



MAINTENANCE FREE MOTORCYCLE BATTERY

Revision 1.1

WP4A-BS


Specifications

Nominal Voltage (V) 12V

Nominal Capacity

10hour rate (0.23A to	10.50V)	2.3Ah
5hour rate (0.391A to	10.20V)	1.955Ah
1C (2.3A to	9.60V)	1.035Ah
3C (6.9A to	9.60V)	0.805Ah

Dimensions

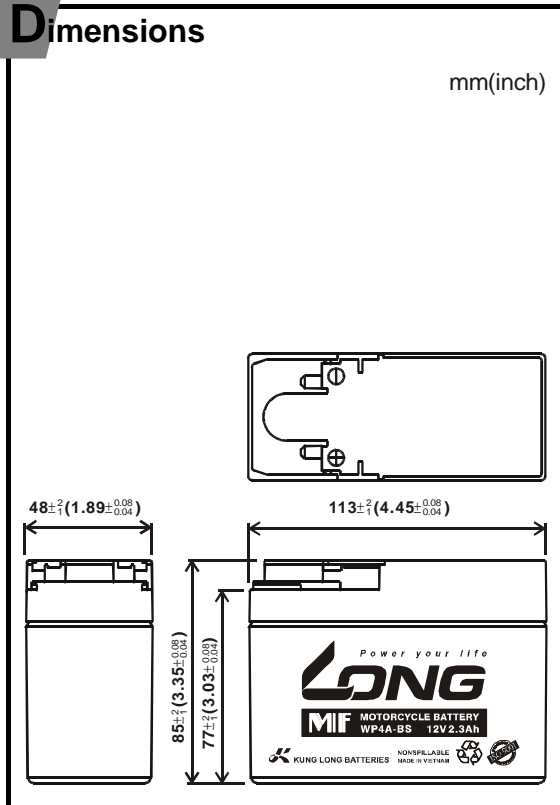

Weight Approx.1.21kg(2.66Lbs.)

Internal Resistance (at 1KHz) 28 mΩ

Cold Cranking Amperes (-17.8°C) : 45A

Operating Temperature Range

Charge	0°C (32°F) to	40°C (104°F)
Discharge	-15°C (5°F) to	50°C (122°F)
Storage	-15°C (5°F) to	40°C (104°F)

Charge Retention (shelf life) at 20°C (68°F)

1 month	92%
3 month	90%
6 month	80%

Life expectancy :

Cycle Use :

- 100% depth of discharge 200 cycles
- 80% depth of discharge 225 cycles
- 50% depth of discharge 500 cycles

Standby Use : 3~5years

Case Material ABS

